



HTP
HONDA TRASH PUMP



MODEL: TPS80

TRASH PUMP

Petrol Powered Specification

8.4HP – 6.3kW Honda Engine

1300 l/min

TECHNICAL DATA SHEET

FOR USE IN NON-REGULATED TERRITORIES ASIA MIDDLE EAST AND AFRICA

TECHNICAL INFORMATION

MODEL

TPS80-M-SF	Manual Recoil Start with Steel Frame
TPS80-M-SFW	Manual Recoil Start with Steel Frame and Wheels
TPS80-E-SF	Electric Start with Steel Frame
TPS80-E-SFW	Electric Start with Steel Frame and Wheels

APPLICATIONS

Industrial	<p>Construction & Civil Engineering: Dewatering excavation sites, trenches and basements. Removing slurry, mud and sediment-laden water. Pumping water with gravel, sand or small stones from site runoff.</p> <p>Mining & Quarrying: Handling mine tailings, slurry or sludge containing rocks and sediment. Moving water mixed with sand, grit or fine ore particles.</p> <p>Wastewater & Sewage Management: Transferring sewage, sludge or industrial effluent with suspended solids. Temporary bypass pumping during maintenance of treatment plants.</p> <p>Industrial Cleaning: Cleaning tanks, pits and sumps with debris-laden liquids. Pumping water mixed with waste materials in factories (metal chips, sawdust, etc.).</p>
Agricultural	<p>Irrigation: Pumping water from rivers, ponds or canals that contain leaves, algae or small debris. Filling irrigation canals or tanks for field watering.</p> <p>Drainage & Dewatering: Removing excess water from flooded field after heavy rains. Draining ditches, ponds or low-lying farmland.</p> <p>Livestock & Aquaculture: Moving pond water or slurry that may contain feed particles, manure or sediment. Maintaining water levels in fish or shrimp ponds with suspended solids.</p> <p>Pesticide & Fertilizer Handling: Pumping water mixed with fertilizer or soil amendments that might contain sediment. Transferring liquid manure or compost tea to irrigation systems.</p>

APPLICATIONS:

Industrial
Agricultural

HONDA

GASOLINE ENGINE

MD

MEDIUM DUTY

TECHNICAL INFORMATION

Engine

Make	Honda
Model	GX270
Power	8.4HP – 6.3kW / 3600 RPM
Type	4-stroke air-cooled single-cylinder
Displacement	270cc / 0.270l
Fuel Type	Gasoline
Starter	Recoil Start / Electric Start
Consumption	313 g/kwh / 2.4 l/h
Noise	90dB at 7m
Fuel Tank Size	5.3l
Oil Tank Size	1.1l

Accessories Included



Pipe Connector Fittings

2 x 3 Inch Pipe Connecting Wrench
Rubber Gaskets



Suction Strainer

Inlet Size: 80mm / 3"
Material: Galvanized steel

Hose Clamps x 3

Recommended Piping



Inlet Hose

Material: Rubber or Neoprene
Type: Reinforced synthetic rubber
Thickness: 3-6mm



Outlet Hose

Material: Rubber or Neoprene
Type: Reinforced synthetic rubber
Thickness: 3-6mm

Pump

Make	Energie
Model	HL80SPL
Inlet and Outlet	3" 80mm / 3" 80mm
Delivery Volume	1300l/min
Max head	27m
Suction lift	8m
Driving Power	6.3kW
Pump Body	Aluminium Alloy
Impeller	Cast Iron
Mechanical Seal	Carbon Ceramic
Working Speed	3600 RPM

Permissible Pumping

Allowable Liquids **Water** (fresh, salt, wastewater)

Solid Handling

Pump 27mm
Restricted by Strainer 19mm

Fuels & Lubricants (Recommended)

Gasoline 95ppm or better
Oils 15W/40

Consumables (Service parts)

Engine Air Filter Contact Dealer Directly
Engine Oil Filter Contact Dealer Directly
Engine Fuel Filter Contact Dealer Directly

Dimensions & Weights

Length 800 mm
Width 505 mm
Height 760 mm
Dry & Wet Weight 83 kg / 90 kg

Policies

Warranty 1 Year Limited Warranty

TECHNICAL INFORMATION

Carbon Ceramic Seal Recommended Pumping Application

Water & Wastewater

Fresh Water, River Water, Ponds, Lakes, Muddy Water / Slurry with Sand and Silt, Sewage (with solids up to 19mm if using the standard suction strainer)

Industrial Fluids

Mild chemicals compatible with the elastomer used:
Can handle fluids with suspended solids (stones, leaves, debris) limited by strainer size

Slurry / Abrasive Fluids

Carbon-ceramic seals are abrasion-resistant, so you can pump:
Sand-laden water
Mud or sludge
Slurry from construction or agricultural sites

Carbon Ceramic Seal Not Recommended Pumping Application

Strong Oxidizers

Hydrogen peroxide (>30%), Peracetic acid, Nitric acid concentrated (>30%), Free chlorine, ozone
Reason: Can attack carbon/ceramic over time and degrade elastomer secondary seals.

Fluids Causing Thermal Shock

Hot concentrated acids poured into cold water, Rapidly changing temperature fluids
Reason: Ceramic is brittle and can crack under sudden temperature changes.

Extremely Abrasive Solids (Beyond Design)

Large rocks, metal pieces, or debris bigger than impeller/strainer limits
Reason: Even though carbon/ceramic is wear-resistant, extremely hard solids can chip the faces or damage the impeller.

Silicon Carbide Seal Recommended Pumping Application

Water & Wastewater

Fresh Water, River Water, Pond Water, Muddy Water, Silt, Sand-laden Water, Slurry or Sludge with Abrasive Solids (within strainer limits).
SiC faces are highly resistant to abrasion, so ideal for dirty water or slurry.

Chemicals (depending on O-ring material)

NBR O-ring: mild water, light oils, some detergents
Viton O-ring: fuels, hydrocarbons, light acids, alcohols
EPDM O-ring: mild alkalis, some acids, detergents
The SiC faces themselves are chemically inert, so the limitation comes from the O-ring.

Abrasive Fluids

Sand-laden water, slurry, wastewater with small solids
SiC is extremely wear-resistant → much longer life than carbon/ceramic or tungsten carbide in abrasive applications

High Temperature Fluids

SiC can tolerate up to 250 °C, so hot water, steam (low-pressure) or warm chemicals are feasible
Elastomer temperature limits still apply

Silicon Carbide Seal Not Recommended Pumping Application

Strong Oxidizers

Concentrated hydrogen peroxide (>30%), Peracetic acid, Aqua regia, Free chlorine, ozone
Even though SiC is chemically resistant, these can attack the elastomer O-ring and sometimes corrode pump metals.

Strong Acids / Bases (Depending on O-ring)

Concentrated sulfuric acid (>50%), Concentrated nitric acid, Concentrated NaOH / KOH
May attack the O-ring or cause corrosion elsewhere in the pump.

Ketones / Polar Solvents


Acetone, MEK, MIBK, Glycol ethers, esters
Cause swelling or degradation of O-rings, even though SiC faces remain stable.

Extremely Abrasive or Oversized Solids

Rocks, metal chunks, sticks larger than impeller / strainer limit (19mm for HL80SPL standard strainer)
Can damage the impeller and may eventually stress the seal faces.

PUMP CURVE

PERFORMANCE CURVE

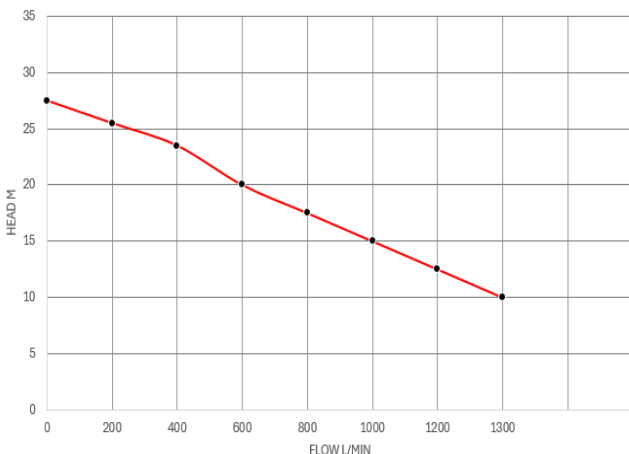

TP80 TRASH PUMP

Flow (l/min)	Head (M)
0	27,5
200	25,5
400	23,5
600	20
800	17,5
1000	15
1200	12,5
1300	10

PRODUCT VIEWS

SIDE VIEW



BACK VIEW




SIDE VIEW



FRONT VIEW



APPROVED DISTRIBUTOR

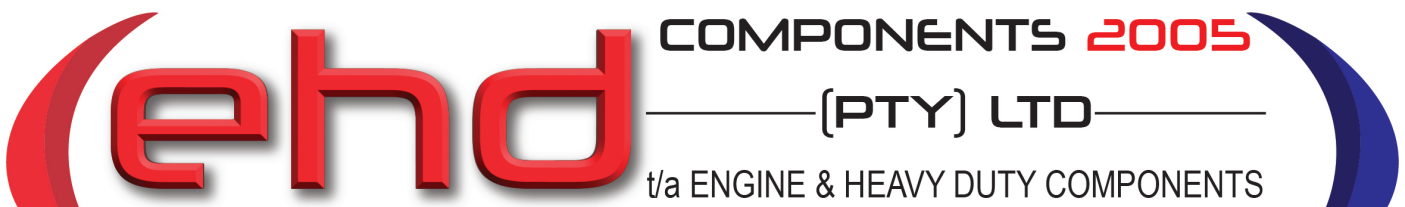

HEAD OFFICE JOHANNESBURG
Tel: +27 (0)11 870 5000
Fax to Mail: 086 676 6628
Cnr Hubert & Marshall Streets,
Marshalltown, Johannesburg 2001
ehd@ehd.co.za

BLOEMFONTEIN
Tel: +27 (0)51 430 5404
17 Krause Street, Oranjesig
Bloemfontein, 9301
ehdbloem@ehd.co.za

CAPE TOWN
Tel: +27 (0)21 510 0567
25 Bellray Business Park
Ampere Street, Stikland Industrial
Cape Town, 7530
ehdcapestown@ehd.co.za

DURBAN
Tel: +27 (0)31 700 1160
Unit 3, Hillmax
31 Hillclimb Rd, Westmead 3610
ehddurban@ehd.co.za