

**COMPONENTS 2005****[PTY] LTD****t/a ENGINE & HEAVY DUTY COMPONENTS****HEAD OFFICE JOHANNESBURG**

Tel: +27 (0)11 870 5000

Fax to Mail: 086 676 6628

Cnr Hubert & Marshall Streets,

Marshalltown, Johannesburg 2001

ehd@ehd.co.za

BLOEMFONTEIN

Tel: +27 (0)51 430 5404

17 Krause Street, Oranjesig

Bloemfontein, 9301

ehdbloem@ehd.co.za

CAPE TOWN

Tel: +27 (0)21 510 0567

25 Bellray Business Park

Ampere Street, Stikland Industrial

Cape Town, 7530

ehdcape@ehd.co.za

DURBAN

Tel: +27 (0)31 700 1160

Unit 3, Hillmax

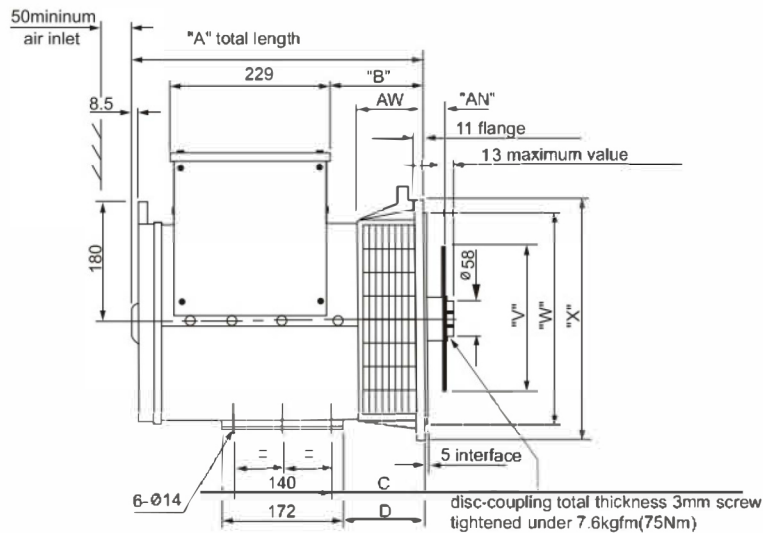
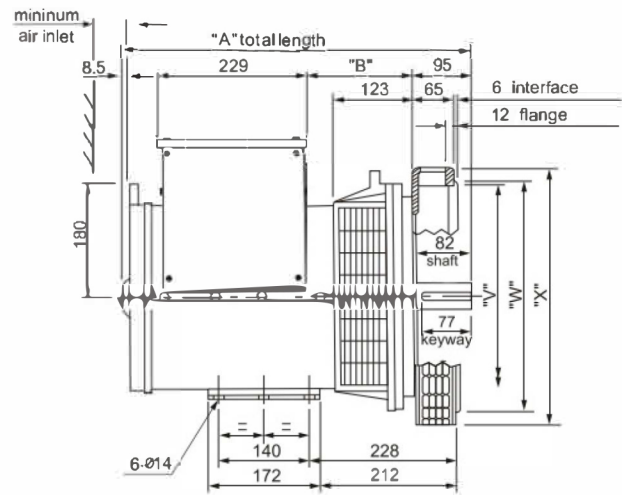
31 Hillclimb Rd, Westmead 3610

ehddurban@ehd.co.za

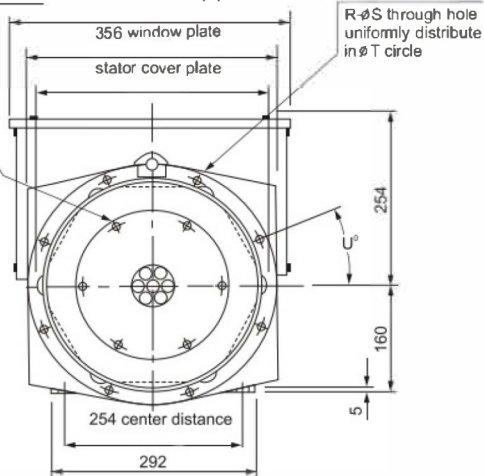
Co. Reg No. 2005/019759/07

Export Code. 20535466

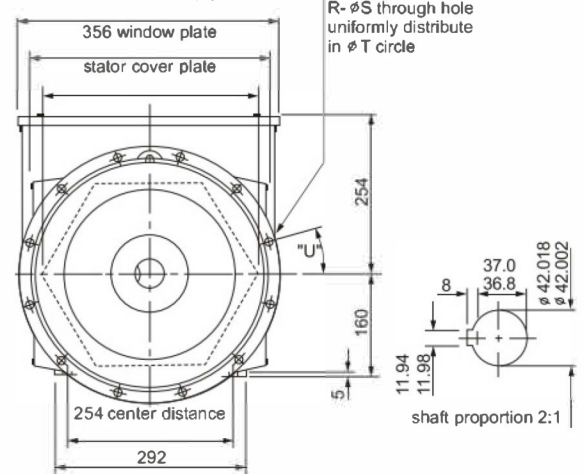
Vat No. 4790223137

SLG164**External dimension****SINGLE BEARING****DOUBLE BEARING**AM- ØAP through-hole
uniformly distribute in ØAR circle.

400 terminal box top plate.



400 terminal box top plate.

**Proud Member of:**Manufacturer's names, numbers, symbols, photos and descriptions are used for reference purposes only and it is not implied that the parts referred to are the products of those manufacturers. Warranty conditions are available on our website www.ehd.co.za

SPECIFICATIONS

SLG164 Alternators																		
RATINGS	Winding 311 / 0.8 Power Factor														Winding 05			
DUTY/TEMP/AMBIENT T°	Cont./125K/40°C							Cont./125K/40°C							Cont.125K/40°C			
PHASE	3 PHASE							1 PHASE							1 PHASE			
SERIES STAR	380		400		415		440								POWER FACTOR			
PARALLEL STAR	190		200		208		220								0.8		1	
SERIES DELTA	220		230		240		254											
DOUBLE DELTA								220		230		240			220,230,240			
	KVA	KW	KVA	KW	KVA	KW	KVA	KW	KVA	KW	KVA	KW	KVA	KW	KVA	KW	KVA	KW
SLG164A	8.1	6.5	8.1	6.5	8.1	6.5	6.2	5	4.7	3.8	4.7	3.8	4.7	3.8	5.4	4.3	6.8	6.8
SLG164B	11	8.8	11	8.8	11	8.8	8.4	6.7	6.4	5.1	6.4	5.1	6.4	5.1	7.4	5.9	8.4	8.4
SLG164C	13.5	10.8	13.5	10.8	13.5	10.8	11	8.8	7.8	6.2	7.8	6.2	7.8	6.2	9	7.2	11	11
SLG164D	16	12.8	16	16	16	12.8	13.5	10.8	9.3	7.4	9.3	7.4	9.3	7.4	10.8	8.6	13	13

Dimension(mm) Single Bearing									
Model	A			B			N.W	G.W	LxWxH
	SAE3/5	SAE4	SAE6	SAE3/5	SAE4	SAE6	(kg)	(kg)	(mm)
SLG164A	403.5	391.5	435.2	119.5	107	151.2	85	95	515x485x620
SLG164B	403.5	391.5	435.2	119.5	107	151.2	90	102	515x485x620
SLG164C	403.5	391.5	435.2	119.5	107	151.2	96	110	515x485x620
SLG164D	403.5	391.5	435.2	119.5	107	151.2	99	116	515x485x620

Dimension (mm) Double Bearing					
Model	A	B	N.W(kg)	G.W(kg)	LxWxH(mm)
SLG164A	511.5	137	91	101	565x485x620
SLG164B	511.5	137	98	108	565x485x620
SLG164C	511.5	137	106	116	565x485x620
SLG164D	511.5	137	112	122	565x485x620

Flange (mm) Single Bearing									
S.A.E.NO.	AW	R	S	T	U°	W	X	C	D
3	105	8	11	428.6	15	409.5	451	145.0	129.0
4	93	8	11	381	15	361.9	402	133	117
5	105	8	11	333.3	22.5	314.3	356	145	129
6*	136.7	8	11	285.8	22.5	266.7	308	176.7	160.7

Flange (mm) Double Bearing							
S.A.E.NO	R	S	T	U°	V	W	X
3	12.0	11.0	428.6	15	396	409.5	451
4	12.0	11.0	381	15	352	361.9	403
5	8.0	11.0	333.3	22.5	301	314.3	356

Disc Coupling (mm)					
S.A.E.NO.	AN	AM	AP	AR	V
6.5	30.16	6	8.7	200.0	215.8
7.5	30.16	8	8.7	222.2	241.2
8	61.9	6	11	244.5	263.4
10	53.98	8	11	295.3	314.2

Proud Member of:



Manufacturer's names, numbers, symbols, photos and descriptions are used for reference purposes only and it is not implied that the parts referred to are the products of those manufacturers. Warranty conditions are available on our website www.ehd.co.za